

S3 Series Mechanical Valve



Ordering code

S3R

-

M5

Specification code

S3R: 3/2 way double-way roll protrude transportation type mechanical valve
S3L: 3/2 way single-way roll protrude transportation type mechanical valve
S3V: 3/2 way single-way vertical prang type mechanical valve

Port size


M5: M5
06: PT1/8
08: PT1/4

Specification


Model	S3R	S3L	S3V
Fluid	Air		
Port Size	M5: M5	06: PT1/8	08: PT1/4
Operating pressure	0~8Kg/cm ²		
Operating temperature	-5~60°C		
Lubrication	Not required		

Dimensions

S3B

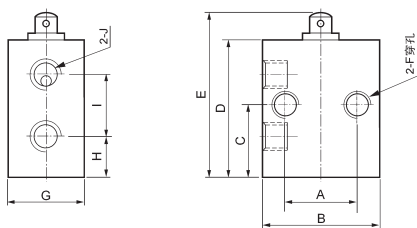

Symbol




Model	A	B	C	D	E	F	G	H	I	J
M5	16	26	15	30	36	M5×0.8	16.5	9	13	M5×0.8
06	23	30	20.5	41	47	M5×0.8	16.5	11.5	17.5	PT1/8
08	24	34	22.5	46	52	M5×0.8	17.5	12	21	PT1/4


Change way stroke

Change way stroke / Model	S3R	S3L	S3V
Axes stroke range	2.4~3.0	2.4~3.0	2.4~3.8
Roller stroke range	4.8~6.2	4.5~6.0	3.4~4.8


S3R Control head



S3L Control head

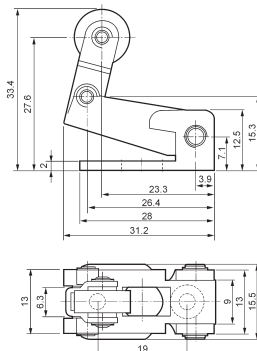

S3V Control head



	A	B
M5	26	16.5
06	30	16.5
08	34	17.5