


Piping Exhaust Valve



This valve is a 3/2-way sliding valve, which is usually installed in the piping to turn on/off airs. When it is turned off, the air pressure in the pneumatic system is exhausted simultaneously.


● Symbol



● Specifications

Model	DGP-1	DGP-2	DGP-3	DGP-4	DGP-5
Port size	G1/8"	G1/4"	G3/8"	G1/2"	G3/4"
Bore	4mm	7mm	10mm	12mm	18mm
Fluid	Filtered air				
Operating pressure	0~1.0MPa				
Operating temperature	5~60°C				
Actuating force	20N				30N

● Dimensions

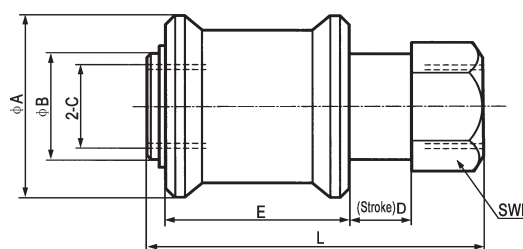

Model / symbol	A	B	C	D	E	F	L
DGP-1	25	13	G1/8	9	28	14	48
DGP-2	30	18	G1/4	11	32	19	58
DGP-3	35	21	G3/8	14	39	22	68
DGP-4	40	26	G1/2	15	45	27	80
DGP-5	46	30	G3/4	18	50	32	100